

Holmatro

Battery Charger PBCH3 (DC)

Intelligent Mobile Charging With Live Diagnostics



Product Overview



- Holmatro Pentheon Battery Charger PBCH3, DC version. Power cord equipped with plug type “car plug”. Suitable for charging Holmatro PBPA batteries, which power Pentheon tools and OmniLock shoring equipment.

Key Features

- **Realtime diagnostics:** Provides direct feedback on the battery’s temperature, state of charge and state of health.
- **Suitable for on-tool battery charging:**
Connect your tool to the charger and charge the battery while it remains on the tool. The battery on the tool always has priority over the one on the charger, which will resume charging when the battery on the tool is 100% full.

Specifications		
Article number		151.000.632
Model		PBCH3 (DC)
Short description		Battery Charger
Battery voltage	VDC	28
DC supply voltage	VDC	12-24
Power	W	73.5
Cable length	m	1.8
Plug type		Carplug ISO 4165
Weight, ready for use	kg	1.6
Temperature range	°C	-20 +55
Dimensions (AxBxC)	mm	222 x 170 x 153

Accessories	
On-Tool Charging Cord POTC1	151.000.499

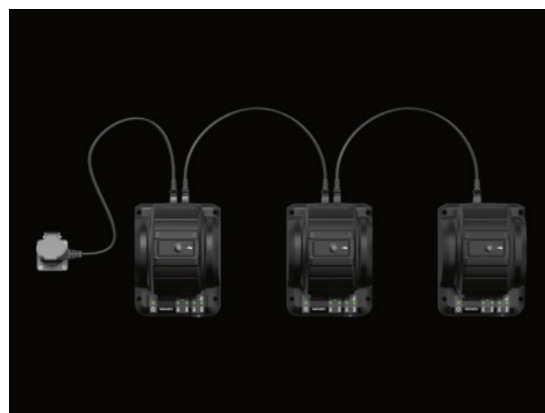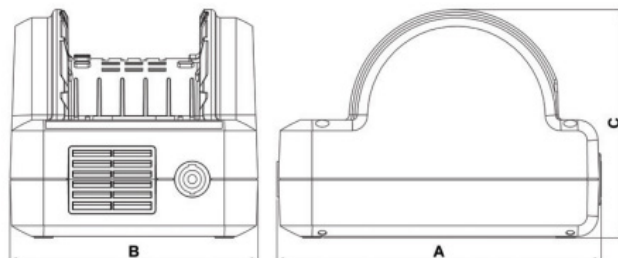

www.frsa.com.au | admin@frsa.com.au | + 61 7 3209 7422

