


PRODUCT DATA SHEET

CCU10 MINI CUTTER

Specifications

article number		151.001.500
model		CCU10
short description		Mini Cutter
max. working pressure	bar/Mpa	720 / 72
battery included		yes
max. cutting opening	mm	59
theoretical cutting force	kN/t	220 / 22.4
protection rate		IP54
sound emission @ 1m/3.25ft	dB(A)	74
sound emission @ 4m/13ft	dB(A)	65
hydraulic oil type		ISO-L HV VG 36
cutter jaw		inclined
weight, ready for use	kg	4.9
temperature range	°C	-20 + 55
weight excl. battery	kg	4.5
dimensions (AxBxC)	mm	554 x 154 x 92
EN 13204 compliant		yes
EN 13204 classification		AC59B-4.9
EN 13204, cutting capacity		1D 2D 3C
NFPA 1936 compliant		yes
NFPA 1936, cutting capacity		A4 B3 C2 D4 E4
round bar (S235 acc. to EN 13204)	mm	22

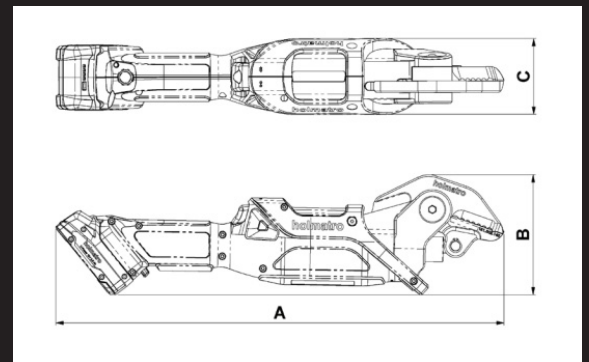

Safety Factors / Tests

hydraulic safety factor	2:1
endurance test tool	1000 cycles of biting in material that cannot be cut
endurance test dead man's button	6000 cycles

Standard Supplied With

- i-Bolt Technology
- Integrated LED lighting
- Two 18V 2Ah batteries CBPA182

Required Accessories

Battery charger CBCH1 (AC-EU)	151.002.112
Battery charger CBCH5 (AC-UK)	151.002.113
Battery charger CBCH7 (AC-AU/NZ)	151.002.114
Battery charger CBCH2 (AC-US)	159.000.212

