

# Holmatro

## Spreader SP 5240 CL

Lightweight Strength for Every Rescue



### Product Overview

- The Holmatro Spreader SP 5240 CL is equipped with CORE Technology. The SP 5240 CL is a compact, ultra-lightweight spreader for spreading, squeezing and pulling with one tool.
- Standard supplied with:
  - Carrying Handle with integrated LED lighting
  - Redesigned, ergonomic control handle with improved grip
  - CORE Technology: quicker, safer, easier

### Key Features

- **Compact & ultra-lightweight, no concessions on performance:**
  - Easy to carry and handle
  - Reducing physical burden
  - Maximum performance at minimum weight
- **Effective profile on the spreading tips:**
  - Perfect grip in every situation
- **Ergonomic carrying handle:**
  - New design increases operator comfort in various working positions
- **New LED lighting in the carrying handle:**
  - No less than six LED lights with a higher light output
  - Rescuers can start their job right away, both during the day and at night, without working in their own shadow
- **New control handle:**
  - Improved ergonomic design, offering better grip for optimal tool control



# Holmatro

## Spreader SP 5240 CL

Lightweight Strength for Every Rescue






Specifications		
Article number		150.012.322
Model		SP 5240 CL
Equipped with (connector type)		CORE
Short description		Spreader
Max. working pressure	bar/Mpa	720 / 72
Spreading distance	mm	510
Max. pulling force	kN/t	47 / 4.8
Pulling distance	mm	393
Max. spreading force	kN/t	131 / 13.4
Theoretical calculated spreading force	kN/t	875 / 89.2
Min. spreading force (EN 13204)	kN/t	40 / 4.1
Max. spreading force, 25mm/1in from the tip	kN/t	70 / 7.1
Max. squeezing force	kN/t	47 / 4.8
Min. squeezing force (EN 13204 2025 Ed.)	kN/t	27 / 2.8
Required oil content (effective)	cc	124
Hydraulic oil type		ISO-L HV VG 15/22
Temperature range	°C	-20 +55
Dimensions (AxBxC)	mm	685 x 274 x 207
Weight (without hose)	kg	9.6
Weight, ready for use (hose connected acc. EN 13204 2025 Ed.)	kg	10.9
EN 13204 2025 Ed classification		SP2-40/510
NFPA 1960, HPF	kN/t	47 / 4.8
NFPA 1960, HSF	kN/t	53 / 5.4
NFPA 1960, LPF	kN/t	24 / 2.4
NFPA 1960, LSF	kN/t	35 / 3.6
NFPA 1960 compliant		Yes

Safety factors / tests	
Hydraulic safety factor	2:1
Endurance test tool	1000 cycles of opening and closing while arms are loaded
Endurance test dead man's handle	6000 cycles

Standard supplied with	
<ul style="list-style-type: none"> <li>Carrying handle with integrated LED lighting</li> <li>Redesigned, ergonomic control handle with improved grip</li> <li>CORE Technology: quicker, safer, easier</li> </ul>	

Accessories	
Spreading Tip Set STS 01	150.006.473
Pulling Attachment Set PAS 01	150.182.273
Pulling Chains Set in Case PCS 02	150.582.021
Pulling Chains Set PCS 01	150.582.152

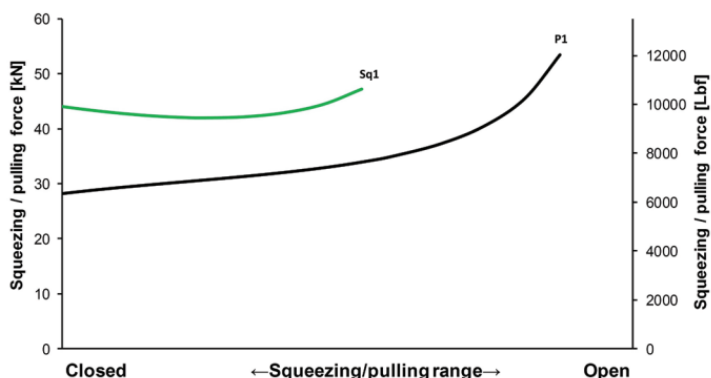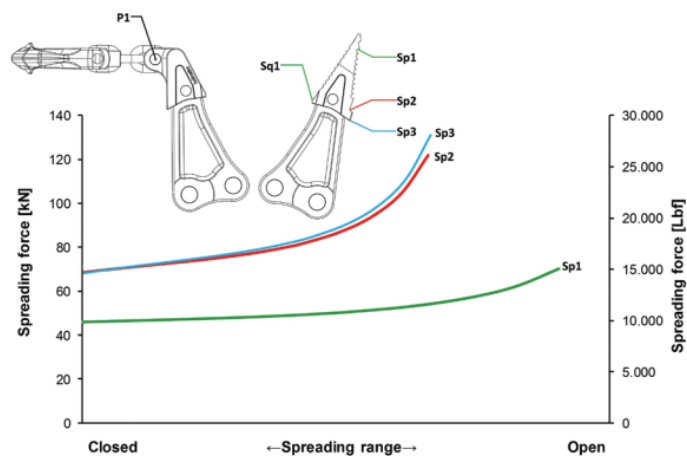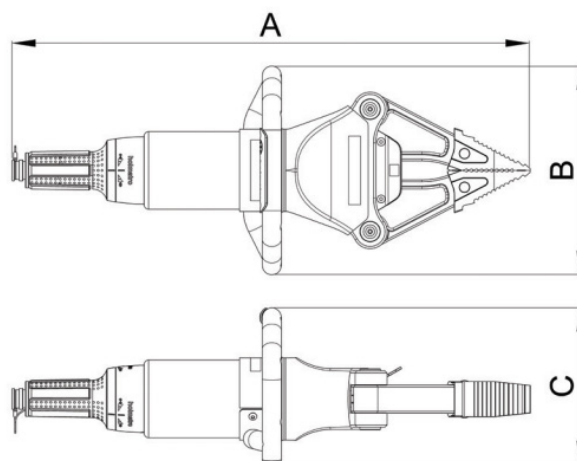

www.frsa.com.au | admin@frsa.com.au | + 61 7 3209 7422