

RAMFAN EFi120xx / EFi150xx

16"/40cm Blower/Exhauster

Industrial Ventilation Systems | Hazardous Locations





Product Overview

The electric powered EFixx Series hazardous location blowers/exhausters, with whole-unit certification, are intended for use in Adverse Atmospheres in accordance with the limitations of the rating. The whole-unit certification not only provides protection and peace of mind to the user; it also prevents suppliers from being linked to the chain of liability.

The largest hazardous location blowers for highest volume of air movement. Use the EFi150xx (1.5 Hp) model for higher velocities, increased volumes and reduced purge or cooling times. 16" (40 cm) integrated duct adapters. Stackable in storage or during operation.

Specifications

Model	EFi120xx (110V/240V)		EFi150xx (115V/230V)	
Part #	EA8120XX-110 Ships as 110V	EA8120XX Ships as 240V	EG8200XX Ships as 115V	EG8200XX-230 Ships as 230V
IMPA Code			591507	
Motor	1.2 hp / 0.9 kW		1.5 hp / 1.1 kW	
Motor Type	Totally Encapsulated Air Flame Proof			
Electric	110/240V, 1ø, 50Hz		115/230V, 1ø, 50/60 Hz	
Amps (Start/Run)	54A / 10A	27A / 5A	80A / 15A	40A / 8A
Cable Lengths	14AWG/2.5mm ²			
Plug Types	A.T.X. 100/130V	A.T.X. 240V	A.T.X. 100/130V	A.T.X. 240V
Operating Temperature	-4°F to +104°F / -20°C to +40°C			
Noise	86.1 dB @ 3' (1 m)		90.2 dB @ 3' (1 m)	
Weight	55 lbs / 25 kg		61 lbs / 28 kg	
Dimensions (h/w/d)	19 x 18 x16 in / 48 x 46 x 41 cm			
Impeller	7-Blade			

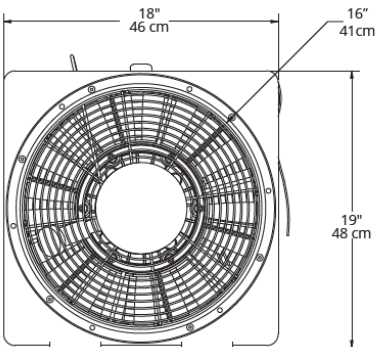

www.frsa.com.au | admin@frsa.com.au | + 61 7 3209 7422

RAMFAN EFi120xx / EFi150xx
16"/40cm Blower/Exhauster

Industrial Ventilation Systems | Hazardous Locations



Performance

Airflow	EFi120xx	EFi150xx
Free Air	3,750 cfm (6,375 m³/hr)	4,459 cfm (7,580 m³/hr)
Through Duct 15'/4.6 m w/ one 90° turn:	2,700 cfm (4,590 m³/hr)	3,179 cfm (5,404 m³/hr)

Certifications & Approvals

Certification String: II 2 G Ex db eb IIB T6 Gb
II 2 G Ex h IIB T6 Gb
Zone 1, 2
T6, non-mining gases up to 85°C

IECEX UL Certificate #: **13.0062X**

EC-Type Examination Certificate #: **DEMKO 09 ATEX 0926969X**

CE Hazardous Location Marking:

Design of fans working in potentially explosive atmospheres: **EN 14986**

Ingress Protection: **IP55**

INMETRO Certificate #: **UL-BR 13.0593X**

Available Accessories

ECKO Flex™ Anti-Static Duct with carrying bag

Order # FDT-1615CBR 16" (40cm) anti-static duct 15' (4.6 m), w/ carrying bag

Order # FDT-1625CBR 16" (40cm) anti-static duct 25' (7.6 m), w/ carrying bag



Silent Guard

Order # EA7108 Reduction of noise: 7db decrease in 3ft (1m) and 10 ft (3m) setback

This accessory cannot be used with duct adapter on section side.

