



FRSA
Fire Rescue Safety Australia



TASK FORCE TIPS
FIRE FIGHTING EQUIPMENT

PRODUCT DATA SHEET

TFT CROSSFIRE PORTABLE MONITOR


XFT-BJ: CrossFire Monitor Top - 65 mm BSPM Rigid Outlet

CrossFire® Monitor Tops offer versatile use as a truck-mounted deck gun or a portable monitor with easy attachment options. With a large 3.25" (83 mm) waterway, these tops provide powerful flow rates up to 1250 GPM (4500 LPM) with low friction loss. Featuring a secure connection, visual verification, and integrated pressure control, these monitors ensure stability and reliable performance during critical operations.

SafeTak Base & Nozzles Sold Separately

FEATURES

- Flow Rate : Delivers up to 1250 GPM (4500 LPM) with low friction loss for powerful suppression
- Connection Versatility : Easily attaches to a truck-mounted flange or portable base
- Pressure-Controlled Lock : Water pressure-locked release prevents accidental disengagement
- Quick Position Adjustment : Handwheel provides seven turns from vertical to stop elevation
- 360° Rotation : Enables full horizontal range for coverage flexibility
- Pressure Gauge : Highly visible gauge for precise monitoring
- Automatic Drain Valve : Built-in valve for convenient maintenance

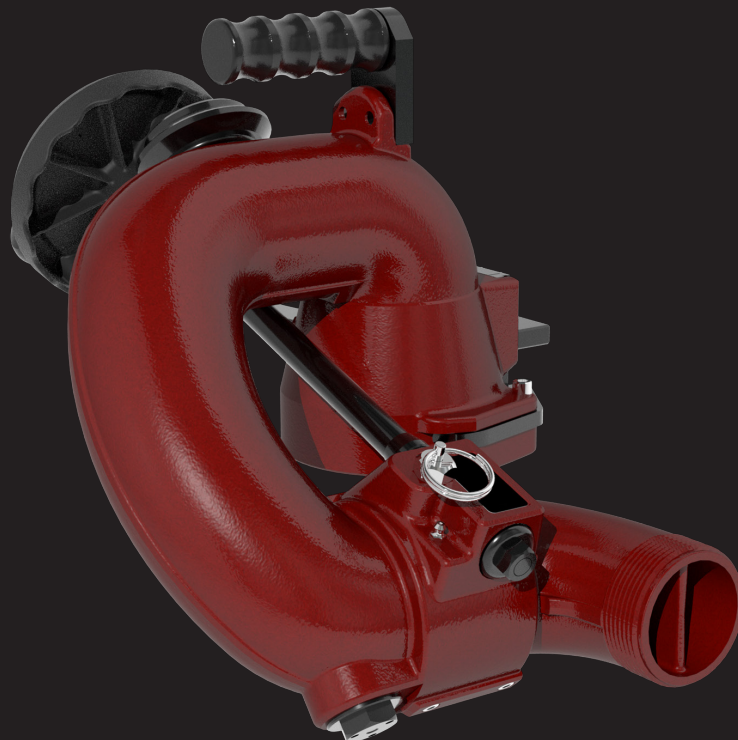

SPECIFICATIONS

Weight	16.100 lbs
Colour	Red
Brand	CrossFire®
Bundle	Monitor Only
Monitor Type	Ground Attack
Monitor Horizontal Range	360°
Monitor Vertical Range	90° – 90°
Monitor Control	Manual
Monitor Outlet Size	65 mm
Monitor Outlet Type	BSP Male
Monitor Outlet Style	Male Threads
Monitor Outlet Swivel	Rigid
Max Flow Rate (LPM)	4500 LPM
Bundle Stream Straightener	Integrated