

PRODUCT DATA SHEET

KRAKEN POWER INSTAGRID LINK 36

Instagrid LINK is a smart power distributor that extends the features of your portable power supply and enables new and powerful applications.

- Island mode – combine Instagrid ONE units for up to 3x capacity. Hot-swap seamlessly for extended run times without the hassle of generators or extension cords.
- Continuous power source – set up a mission-critical power supply with no interruptions.
- Power up to three devices with RCD-protection without noise or exhaust fumes throughout the whole working day.


Parameter	Value
Operation	
Nominal voltage output	240 V AC / 60Hz
Nominal output current	15 A
Nominal output power	3,600 W
Switching time	< 20 ms
Protection	
Residual circuit device	3x 1P+N RCD type A, 30mA
Circuit breaker	1P 16 A (tripping characteristic C)
General Information	
Weight	4.5 kg
Size	400 x 310 x 140 mm
IP Class	IP54
Protection class	Class I provided with Class II construction
Ambient temperature	-15°C to 40 °C
Receptacles	
Input receptacles	3x Neutrik powerCON TRUE1 TOP®
Output receptacles	3x AS/NZS 3112 15 A

LINK | Type I | 240V | 15A | IP54
 Art.Nr.: 990-00006
 EAN/GTIN: 4260710090104




Input Logic

- The usual ONE charging cable can be used to connect Instagrid LINK to main power
- ① Instagrid LINK always uses power from when available, otherwise it uses power from ② and ③
- ② and ③ work in a "ping-pong" system switch to another source only occurs if power from the current source ceases
- Continuous power source:
Plug main power into ① +
one or two Instagrid ONE into ② and ③

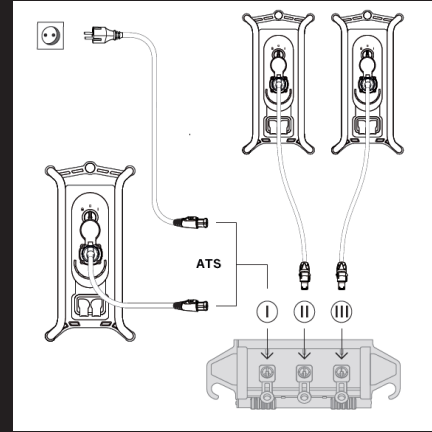

Operation and Transport


- Optimised for mounting on Instagrid ONE ①
- 4 sturdy feet for stability and grip ②
- Solid frame for custom mounting (e.g. velcro straps) ③
- Surface mounting with screws ④

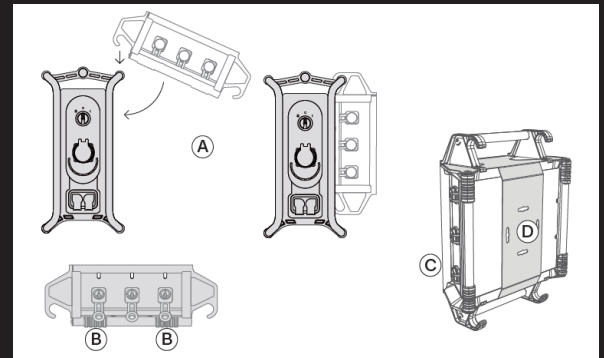

Operation Modes

	Active	LED blinks GREEN
	Ready / standby	LED lights up WHITE
	Inactive	LED is OFF
	Service	LED lights up RED

Overview

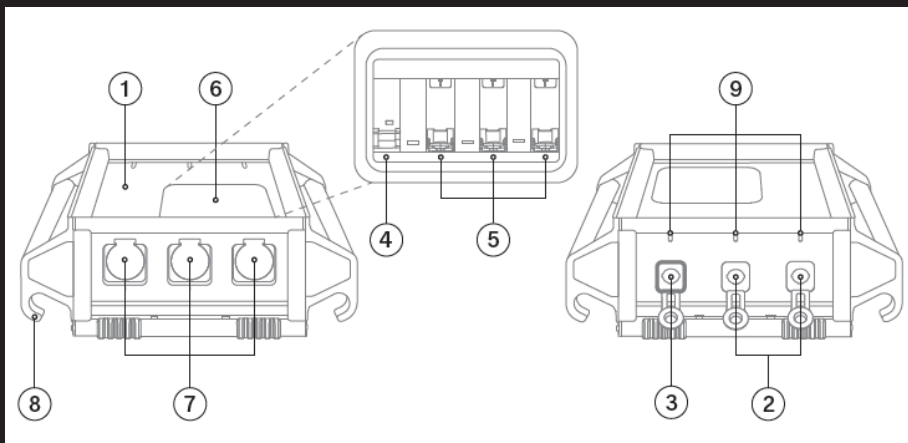

- 1 Housing
- 2 2x Secondary input
Neutrik powerCON TRUE1 TOP®
- 3 1x Primary input
Neutrik powerCON TRUE1 TOP®
- 4 1x Circuit breaker (MCB)
- 5 3x Circuit breaker (RCCB)
- 6 Accessable fuse box
- 7 3x Output receptacle
- 8 Handle and hook
- 9 3x LED light